


MSV7X7515D

3Mega Pixel



Type	AI VARI		Mount	CS		
Focal Length	7.5~50.0mm		Back Focus	9.269~10.693mm		
Fno.	F1.5		Mechanical Bf	8.2mm		
Designed Image Format	1/2.7" (φ 6.6mm)		Exit Pupil	-79.473 ~ -57.764mm		
Operation Range	Iris	F1.5-T360	Filter Size	-		
	Focus	0.5m~∞	Aperture	Front	φ 30.3mm	
	Zoom	7.5~50.0mm		Rear	φ 9.2mm	
Control	Iris	DC Galvanometer	Dimension	φ 46.3 x 68.4mm		
	Focus	Manual Control		Weight	162g	
	Zoom	Manual Control				
	ICR	-				
Object Size at MOD	Wide	4:3 268.0x363.4mm	16:9	220.2x406.5mm		
	Tele	47.1x62.8mm		39.0x69.6mm		
Field of View	D	47.4° ~ 7.8°	16:9	48.2° ~ 7.9°		
	H	38.0° ~ 6.2°		42.2° ~ 6.8°		
	V	28.6° ~ 4.6°		23.6° ~ 3.8°		
Control	Iris		Focus		Zoom	-
Driving Coil/Supply Volt	190Ω		-		-	-
Damping Coil/Current	1310Ω		-		-	-
Response Time	-		-		-	-
Potentiometer	-		-		-	-
Light Measuring Method	-					
Input Signal	-					
Iris Accuracy	-					
Sensitivity Adjustment	-					
Operating Temperature	-10 ~ +50 °C					


DIMENSIONS

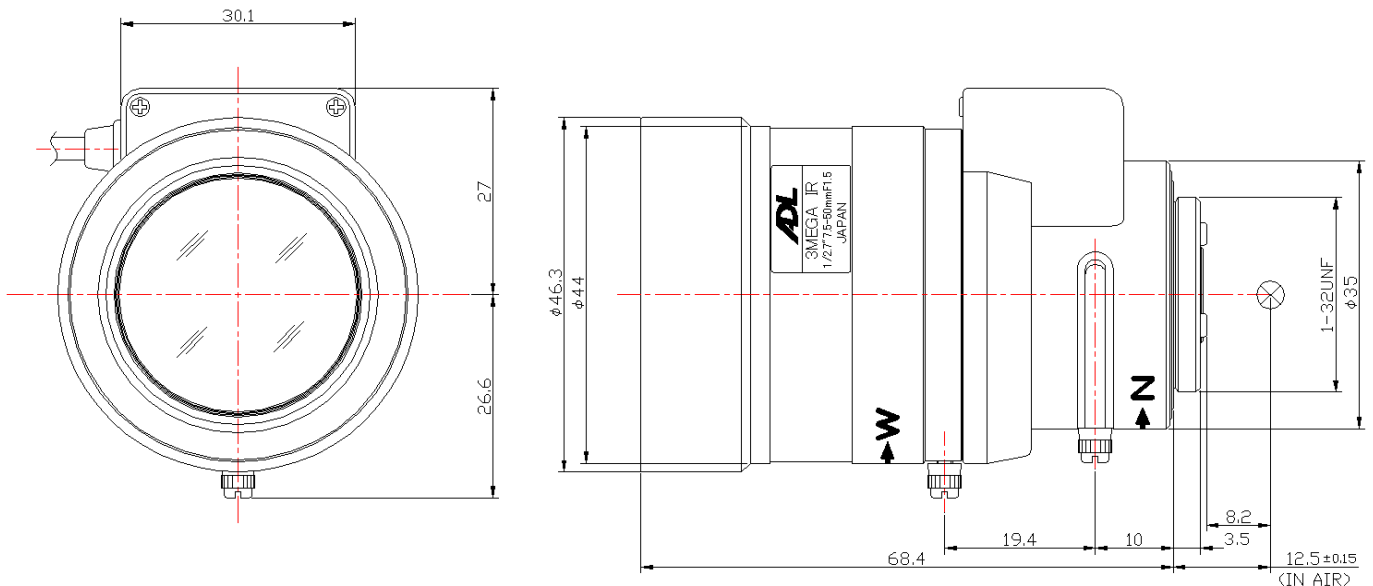

Wiring Diagram

4 Pin Standard Connector for Auto Iris

Pin No. 1	Damping (-)
Pin No. 2	Damping (+)
Pin No. 3	Driving (+)
Pin No. 4	Driving (-)



Subject to change without notice