


SVF3X3313IR-BCD-MD

Type	AI VARI		Mount	ø14 Straight Mount		
Focal Length	3.3~10.0mm		Back Focus	5.7~12.3mm		
Fno.	F1.3		Flange Back	13.8mm		
Designed Image Format	1/2.7" (ø 6.75)		Exit Pupil	-103.3 ~ -21.5mm		
Operation Range	Iris	F1.3-F360	Filter Size	-		
	Focus	0.5m~ ∞	Aperture	Front	ø 15.9mm	
	Zoom	3.3~10.0mm		Rear	ø 6.6mm	
Control	Iris	DC Galvanometer	Dimension	ø29 x 37.9mm		
	Focus	Mortorized		Weight	24.2g	
	Zoom	Mortorized				
Object Size at MOD	Wide	687.3x1090.5mm	543.0x1373.2mm			
	Tele	214.4x289.3mm	178.4x324.4mm			
Field of View	D	123.3~39.6°	16:9	127.1~40.5°		
	H	93.7~31.6°		107.0~35.4°		
	V	67.9~23.7°		55.9~19.8°		
Control	Iris	Focus	Zoom			
Motor type	Galvanometer	PM type stepping motor	PM type stepping motor			
Driving Coil/Supply Volt.	190Ω	-	-			
Damping Coil/Current	855Ω	-	-			
IR cut filter	-	-	-			
Operation voltage	-	2.8V ~ 3.6V	2.8V ~ 3.6V			
Coil resistance	-	28.5Ω/phase ±7%	28.5Ω/phase ±7%			
Excite driving method	-	1-2phase Bipolar Constant voltage	1-2phase Bipolar Constant voltage			
Reduction ratio	-	1/131.574	1/131.574			
Step angle	-	0.171°	0.171°			
Insulation resistance	-	1MΩ or more	1MΩ or more			
Light Measuring Method	-					
Input Signal	-					
Iris Accuracy	-					
Sensitivity Adjustment	-					
Operating Temperature	-10 ~ +50 degree C					


DIMENSIONS

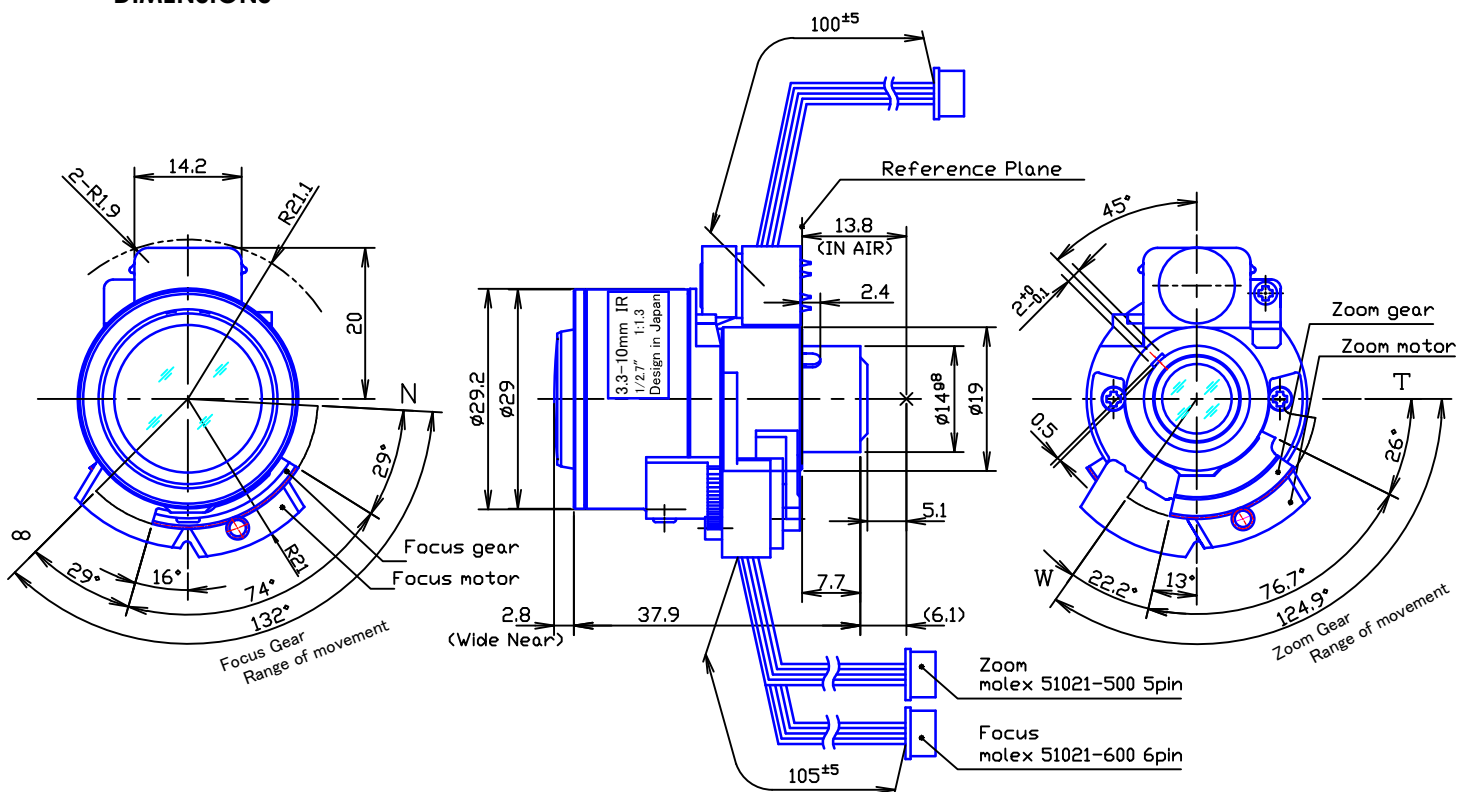

SVF3X3313IR-BCD-MD


CONNECTION & CONTROL

(1) Auto Iris terminal

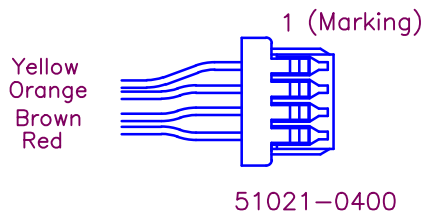


Pin number	Color	Assignment
1	Yellow	Dump +
2	Orange	Dump -
3	Brown	Drive +
4	Red	Drive -

(2) Zoom Motor Control terminal

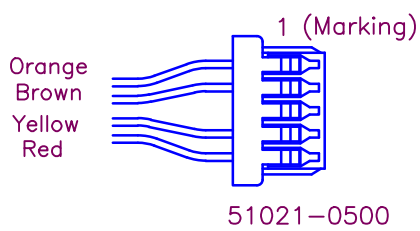

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	Yellow	<u>B</u>
5	Red	<u>A</u>

(3) Focus Motor Control terminal

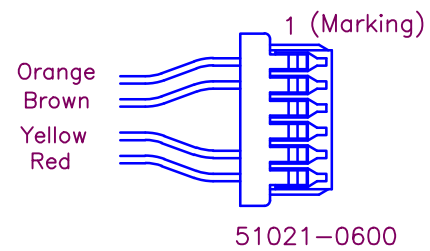

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	N/A	N/A
5	Yellow	<u>B</u>
6	Red	<u>A</u>

(4) Zoom/Focus Motor Control Excitation pattern



Excite Pattern of CW revolution				
Step	A	<u>A</u>	B	<u>B</u>
0	H	L	H	L
1	L	L	H	L
2	L	H	H	L
3	L	H	L	L
4	L	H	L	H
5	L	L	L	H
6	H	L	L	H
7	H	L	L	L