


# MSV7X7515D

3 Mega Pixel



Type	AI VARI		Mount	CS
Focal Length	7.5~50.0mm		Back Focus	9.269~10.693mm
Fno.	F1.5		Mechanical Bf	8.2mm
Designed Image Format	1/2.7"( $\phi$ 6.6mm)		Exit Pupil	-79.473 ~ -57.764mm
Operation Range	Iris	F1.5-F360	Filter Size	-
	Focus	0.5m~ $\infty$	Aperture	Front
Zoom	7.5~50.0mm	Rear		$\phi$ 9.2mm
Control	Iris	DC Galvanometer	Dimension	$\phi$ 46.3 x 68.4mm
	Focus	Manual Control		Weight
	Zoom	Manual Control		
	ICR	-		
Object Size at MOD	Wide	4:3 268.0x363.4mm	16:9 220.2x406.5mm	
	Tele	47.1x62.8mm	39.0x69.6mm	
Field of View	D	47.4° ~ 7.8°	48.2° ~ 7.9°	
	H	4:3 38.0° ~ 6.2°	16:9 42.2° ~ 6.8°	
	V	28.6° ~ 4.6°	23.6° ~ 3.8°	
Control	Iris	Focus	Zoom	-
Driving Coil/Supply Volt	190 $\Omega$	-	-	-
Damping Coil/Current	1310 $\Omega$	-	-	-
Response Time	-	-	-	-
Potentiometer	-	-	-	-
Light Measuring Method	-			
Input Signal	-			
Iris Accuracy	-			
Sensitivity Adjustment	-			
Operating Temperature	-10 ~ +50 °C			


## DIMENSIONS

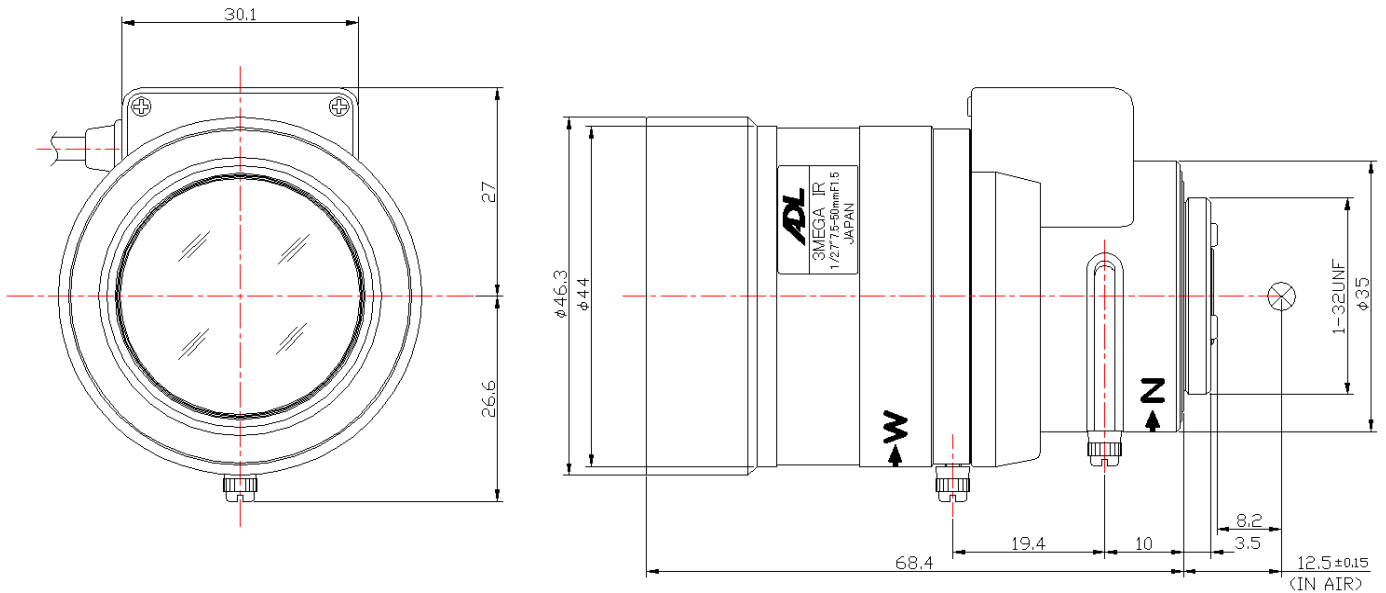

## Wiring Diagram

4 Pin Standard Connector for Auto Iris

Pin No. 1	Damping (-)
Pin No. 2	Damping (+)
Pin No. 3	Driving (+)
Pin No. 4	Driving (-)



Subject to change without notice