


HZ35X1015M

Type	AI ZOOM		Mount	C	1/2"	
Focal Length	10~350mm		Back Focus	14.48mm		
Fno.	F1.5		Mechanical Bf	17.53mm	C	
Designed Image Format	1/2"(4.8x6.4mm)		Exit Pupil	98.64mm		
Operation Range	Iris	F1.5~F1000	Filter Size	M86 P=1.0	CV	
	Focus	2.5m ~ infinity	Aperture	Front		∅ -
	Zoom	10~350mm		Rear		∅ -
Control	Iris	DC Motor	Dimension	112x100x249.5mm		
	Focus	DC Motor		Weight	1950 g	
	Zoom	DC Motor				
Object Size at MOD	Wide	1496x 43.4mm				
	Tele	1121x 32.6mm				
Field of View	D	-	-			
	H	1/2" 35.3°~1.05°	1/3" 26.7°~0.79°			
	V	26.7°~0.79°	20.1°~0.59°			
Control	Iris	Focus	Zoom			
Driving Coil/Supply Volt.	DC 6-12V	DC 6-12V	DC 6-12V			
Damping Coil/Current	60mA or less	60mA or less	60mA or less			
Response Time	about 3 sec.	about 14 sec.	about 7 sec.			
Potentiometer	-	-	-			
Light Measuring Method	Average to Peak(Factory set at Average)					
Input Signal	Video Signal (V or VS)					
Iris Accuracy	±15% at Video Signal Level					
Sensitivity Adjustment	0.4~1.0Vp-p(Video Signal)					
Operating Temperature	-10 ~ +50 degree C					

DIMENSIONS

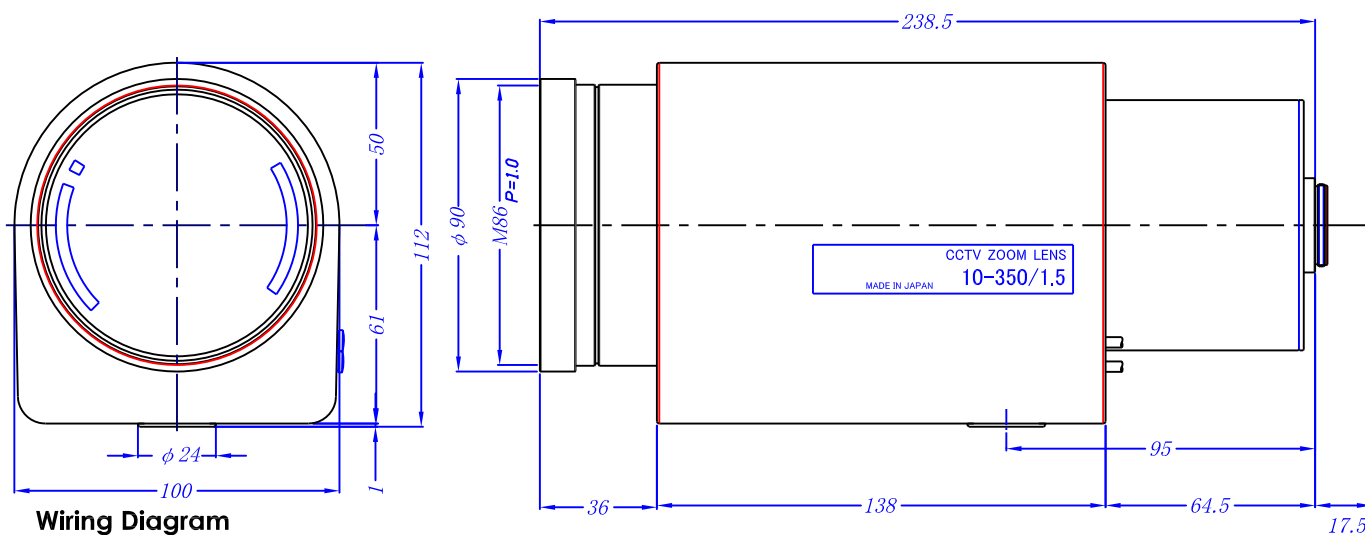

1) 2-core Cable for Iris

	OPEN	CLOSE
RED	+	GND
BLACK	GND	+

2) 4-core Cable for Focus / Zoom Control

Black	Focus	(+)	Far to Near	(-)	Near to Far
Green	Focus	(-)	Far to Near	(+)	Near to Far
Yellow	Zoom	(+)	Wide to Tele	(-)	Tele to Wide
Red	Zoom	(-)	Wide to Tele	(+)	Tele to Wide