


SVF3X3313IR-BCDN-MD

Type	AI VARI	Mount	ø14 Straight Mount			
Focal Length	3.3~10.0mm	Back Focus	5.7~12.3mm			
Fno.	F1.3	Flange Back	13.8mm			
Designed Image Format	1/2.7" (ø 6.75)	Exit Pupil	-103.3 ~ -21.5mm			
Operation Range	Iris	F1.3-F360	Filter Size	-		
	Focus	0.5m~ ∞	Aperture	Front	ø 15.9mm	
	Zoom	3.3~10.0mm		Rear	ø 6.6mm	
Control	Iris	DC Galvanometer	Dimension	ø29 x 37.9mm		
	Focus	Mortorized		Weight	26.7g	
	Zoom	Mortorized				
Object Size at MOD	Wide	687.3x1090.5mm	543.0x1373.2mm			
	Tele	214.4x289.3mm	178.4x324.4mm			
Field of View	D	123.3°~39.6°	16:9	127.1°~40.5°		
	H	93.7°~31.6°		107.0°~35.4°		
	V	67.9°~23.7°		55.9°~19.8°		
Control	Iris	Focus	Zoom			
Motor type	Galvanometer	PM type stepping motor	PM type stepping motor			
Driving Coil/Supply Volt.	190Ω	-	-			
Damping Coil/Current	855Ω	-	-			
IR cut filter	3.5V ~ 5.0V	-	-			
Operation voltage		2.8V ~ 3.6V	2.8V ~ 3.6V			
Coil resistance		28.5Ω/phase ±7%	28.5Ω/phase ±7%			
Excite driving method		1-2phase Bipolar Constant voltage	1-2phase Bipolar Constant voltage			
Reduction ratio		1/131.574	1/131.574			
Step angle		0.171°	0.171°			
Insulation resistance		1MΩ or more	1MΩ or more			
Light Measuring Method		-	-			
Input Signal		-	-			
Iris Accuracy		-	-			
Sensitivity Adjustment		-	-			
Operating Temperature		-10 ~ +50 degree C				


DIMENSIONS

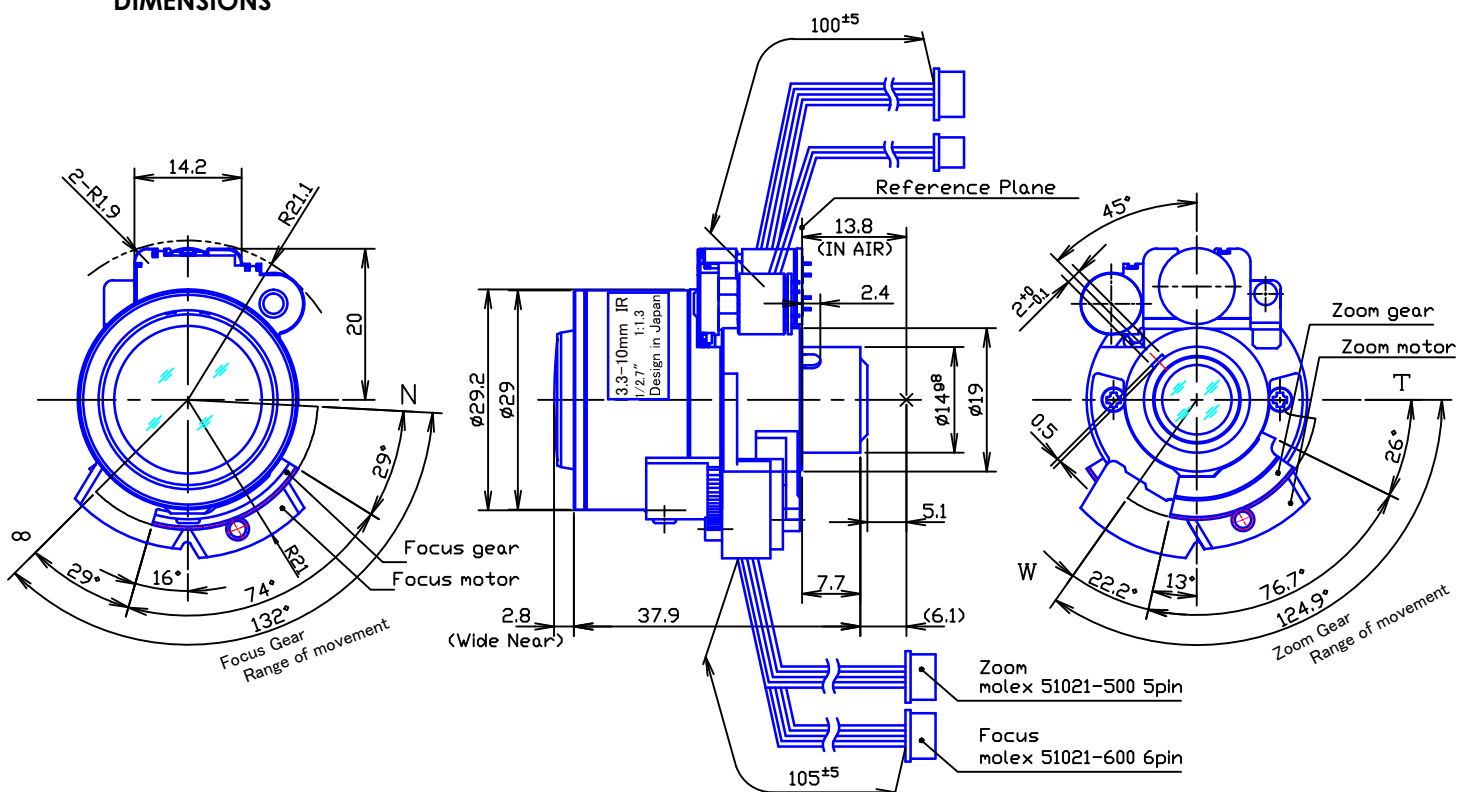

SVF3X3313IR-BCDN-MD


CONNECTION & CONTROL

(1) Auto Iris terminal

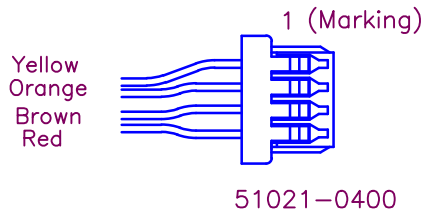


Pin number	Color	Assignment
1	Yellow	Dump +
2	Orange	Dump -
3	Brown	Drive +
4	Red	Drive -

(2) IR Cut Filter Control terminal

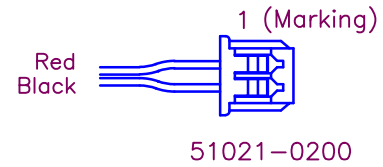


Pin number	Color	Assignment
1	Red	IR IN/OUT(+/-)
2	Black	IR GND

(3) Zoom Motor Control terminal

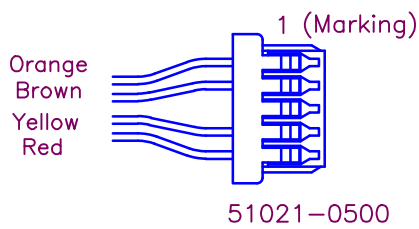

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	Yellow	<u>B</u>
5	Red	<u>A</u>

(4) Focus Motor Control terminal

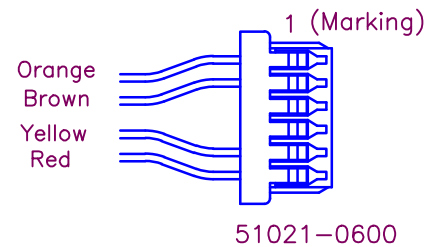

Pin number	Color	Assignment
1	Orange	B
2	Brown	A
3	N/A	N/A
4	N/A	N/A
5	Yellow	<u>B</u>
6	Red	<u>A</u>

(5) Zoom/Focus Motor Control Excitation pattern



Excite Pattern of CW revolution				
Step	A	<u>A</u>	B	<u>B</u>
0	H	L	H	L
1	L	L	H	L
2	L	H	H	L
3	L	H	L	L
4	L	H	L	H
5	L	L	L	H
6	H	L	L	H
7	H	L	L	L